


MULTIFLEX EXTREMEFLEX PVC

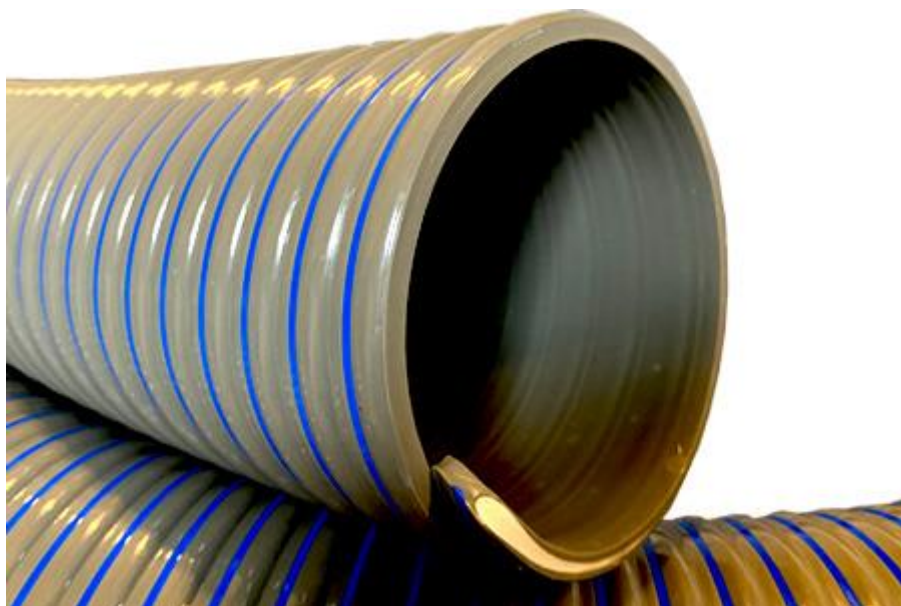

Suction and discharge slurry tanker PVC hose, used for municipal vehicles and tank trucks. Thanks to its increased flexibility and lower weight, this hose is very convenient and makes the operator's work easier. It has good resistance to freezing conditions at subzero ambient temperatures, UV radiation, and ozone. It is compatible with all popular connectors such as STORZ and CAMLOCK. It also works well as a pipeline component for transferring water or slurry.

Inner wall	PVC
Outer wall	PVC
Reinforcement	Rigid PVC spiral
Temperature range	-25°C to +60°C

Variant	Inner Diameter (mm)	Work Pressure – BAR	Burst Pressure – BAR	Bending Radius (mm)	Coil (m)
22500020	20	6	18	80	50
22500025	25	6	18	100	50
22500032	32	6	18	130	50
22500038	38	6	18	155	50
22500052	52	4	12	200	50
22500063	63	4	12	260	50
22500076	76	4	12	310	50
22500080	80	3	9	320	50
22500090	90	3	9	360	50
22500102	102	3	9	410	30
22500110	110	2,5	7,5	450	30
22500127	127	2,5	7,5	510	20
22504152	152	2	6	610	20
22500203	203	1,5	4,5	850	10