


ARIZONA SUPERELASTIC PVC

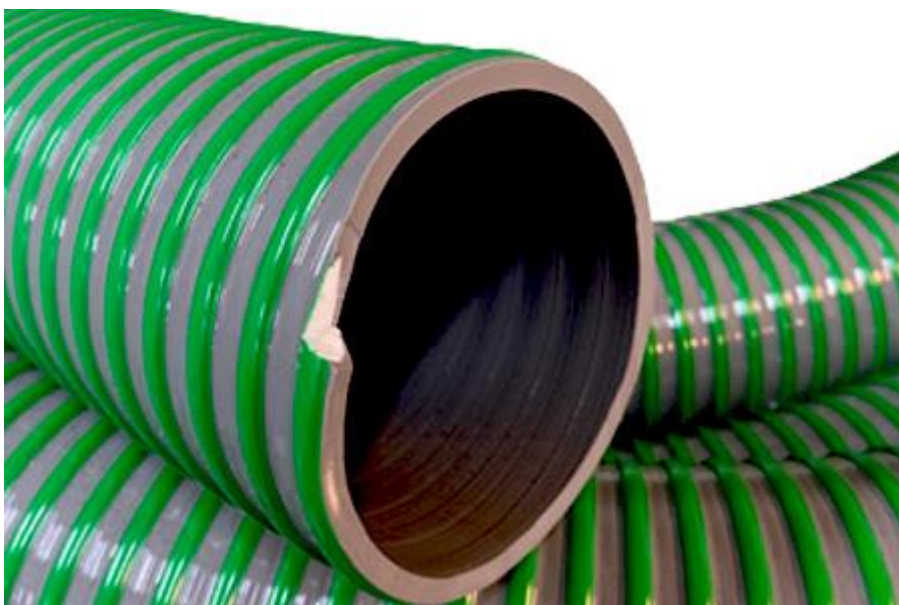

Top-quality suction and discharge slurry tanker PVC hose for municipal vehicles and tank trucks. Thanks to its excellent flexibility and resistance to mechanical damage, this hose is durable and long-lasting. It is resistant to freezing conditions at subzero ambient temperatures, UV radiation, and ozone.

The hose is compatible with all popular connectors, such as STORZ and CAMLOCK. It can also be used as a pipeline component for transferring water or slurry.

Inner Wall	PVC
Outer Wall	PVC
Reinforcement	Rigid PVC spiral
Vacuum	0,9 BAR
Temperature Range	-25°C to +55°C

Variant	Inner Diameter (mm)	Outer diameter (mm)	Work Pressure - BAR	Burst Pressure - BAR	Bending Radius (mm)	Weight (g/m)	Coil (m)
91107507692R2	76	88,4	4	12	300	1700	30
91107508092R2	80	92,6	3,5	10,5	320	1850	30
91107509092R2	90	103,4	3,5	10,5	360	2250	30
91107510092R2	100	114,6	3	9	400	2700	20
91107511082R2	102	116,2	3	9	400	2700	30
91107512782R2	110	125	3	9	440	3100	30
91107515282R2	127	143,6	2,5	7,5	510	3900	20
91107520482R2	152	170,4	2	6	610	5000	20
91107510292R2	203	229	1,5	4,5	800	9500	20