


MASTER-FORM HP 140 EPDM

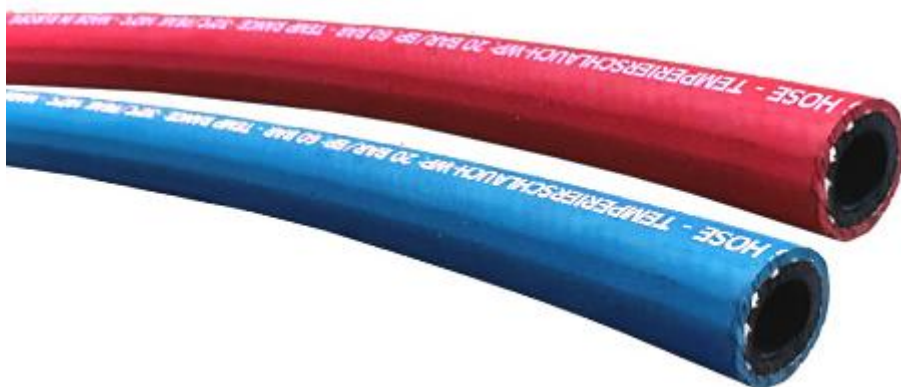

A high-quality red or blue rubber hose designed for hot water, glycol, and light water-based chemicals.

This hose is specifically designed for use in injection molding and temperature control systems. It is highly flexible while maintaining full flow, even in very short sections—making it suitable for use in so-called "bridges" within installations.

The outer layer is resistant to abrasion, a desirable feature in rotary molds where hoses often undergo significant movement. It is also durable in installations with poor water quality, such as hard water with sediment.

The hose is compatible with all popular quick coupling systems for injection molds. Connectors can be crimped on low-pressure ferrules or traditionally mounted using worm gear clamps.

The hose is manufactured in Europe and **sold only in full coils of 40 meters.**

| | |
|-------------------|------------------------------|
| Inner wall | EPDM |
| Outer wall | EPDM |
| Reinforcement | Strong textile reinforcement |
| Work pressure | 20 BAR |
| Burst pressure | 60 BAR |
| Temperature range | -20°C to +140°C |

| Variant | Inner Diameter (mm) | Outer Diameter (mm) | Colour | Coil (m) |
|----------|------------------------|------------------------|--------|-------------|
| 73000918 | 9,5 | 18 | Red | 40 |
| 73010918 | 9,5 | 18 | Blue | 40 |
| 73001222 | 12,7 | 22 | Red | 40 |
| 73011222 | 12,7 | 22 | Blue | 40 |
| 73001624 | 16 | 24 | Red | 40 |
| 73011624 | 16 | 24 | Blue | 40 |
| 73001927 | 19 | 27 | Red | 40 |
| 73011927 | 19 | 27 | Blue | 40 |